


KLP® Rollblocks

For flexible storage of your coils

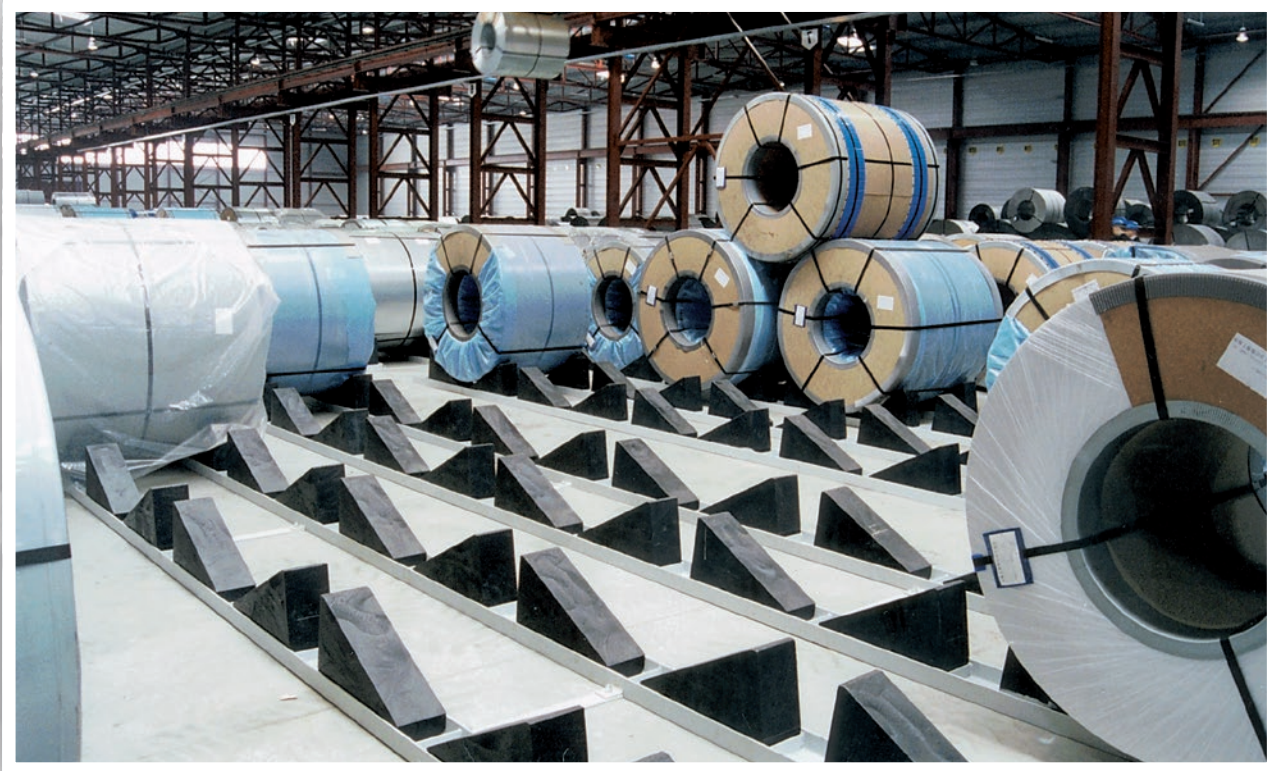

Since 1986, Lankhorst Mouldings have been marketing KLP® Rollblocks. From that moment, the Rollblock coil storage system has become a standard for many steel companies. Our KLP® Rollblock System offers coil storage that is both safe and flexible.

KLP® Rollblocks have to be placed into standard UNP-channels. The blocks have no fixed position; they can be moved depending on the diameter of the coil - ideal if you have a variety of small and large coils.

KLP® Rollblocks allow storage of coils with diameters ranging from 500 to 2500 mm. The 28° chock angle offers maximum support and allows coil stacking up to three levels.

One system for all your coils!



original
KLP®

Your partner in safe coil storage



Why use KLP® Rollblocks in your warehouse?

- Improved safety for personnel (TÜV approved)
- Easy three level stacking
- Less damage to your precious coils
- Splinter proof
- Long lifetime
- Enormous load bearing capacity
- Flexible and efficient
- No oil absorption

KLP® Rollblocks were developed in close co-operation with the European steel industry. Rollblocks comply with all industrial requirements.

KLP® Rollblocks are used world-wide: Australia, Mexico, Canada, United States, Brazil, China, India, Indonesia, South Africa and in almost all European countries.

KLP® Rollblocks are available in two qualities: our black 'standard' range, which can be used for coils with a temperature up to 60°C and a range allowing storage of coils with a temperature up to 110°C.

KLP® Rollblocks are produced from plastics. Years of experience ensure the best choice of materials; the product becomes virtually indestructible and resilient. When subjected to loading KLP® Rollblocks flex slightly, but will return to their original shape immediately afterwards. KLP® Rollblocks considerably reduce damage to coils.

Our standard Rollblock (type 55/16-2) is a true 'heavy duty' block: each Rollblock can bear about 25 tons. One coil is supported by four Rollblocks. Apart from this Rollblock we offer several other dimensions: for every coil warehouse Lankhorst Mouldings can offer the right storage system. Our sales people will be happy to assist you in finding the optimal solution.



Standard (left) and Heat Resistant (right) KLP® Rollblock

| Type | Application | UNP channel | Diameter coils (mm) | Maximum load (tons) using 4 Rollblocks |
|-----------------|------------------------------|-------------|---------------------|--|
| RB 55/16-2 | Standard | 180 | 875 - 2500 | 100 |
| RB 55/16-2 HR | Heat Resistant (up to 110°C) | 180 | 875 - 2500 | 100 |
| RB 55/12 M2 | Standard | 140 | 500 - 2500 | 30 |
| RB 55/12 M2 HR | Heat Resistant (up to 110°C) | 140 | 500 - 2500 | 30 |
| RB 55/16-2 'ZN' | Standard | 180 | 500 - 2500 | 60 |

The English/American equivalent of the European UNP-180 channel is the C7 channel. Other sizes upon request.